





Yeomans Pump Product Line






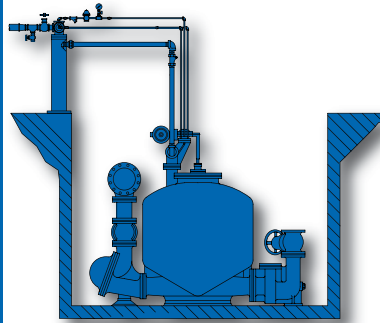


The Standard of Excellence NOW and in the Future

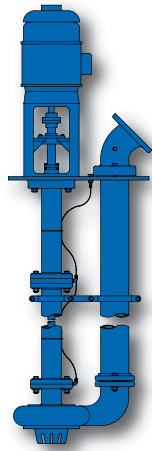

Series	3000	4000	6150	6235
Description	Vertical Suspended Screened-Inlet Wet-Pit Pumps	Shone® Pneumatic Ejectors	Horizontal Base Mounted Dry-Pit Solids Handling Pumps	Vertical Close-Coupled Dry-Pit Solids Handling Pumps
Capacities	Up to 3,000 gpm (681 m ³ /hr)	Up to 600 gpm (136 m ³ /h)	Up to 20,000 gpm (4,540 m ³ /h)	Up to 2,500 gpm (568 m ³ /h)
Head	Up to 350 feet (107 m)	Up to 170 feet (52 m)	Up to 300 feet (91 m)	Up to 225 feet (69 m)
Pressure	To fit the application.	To fit the application.	To fit the application.	To fit the application.
Horsepower	Up to 125 hp (93 kW)	Varies by air compressor system selected.	Up to 350 hp (261 kW)	Up to 125 hp (93 kW)
Drives	Vertical electric motors with direct flexible coupling.	Air operated. Optional systems available for steam operation.	Horizontal electric motors with direct flexible coupling.	Vertical close-coupled electric motors.
Liquids Pumped / Applications	Wastewater, drainage, industrial waste, process waste	Wastewater, sewage, scum	Wastewater, sewage, sludge, light slurries, stormwater, industrial waste	Wastewater, sewage, sludge, light slurries, stormwater, industrial waste
Temperature	Up to 200°F (93°C)	Up to 200°F (93°C)	Up to 150°F (66°C)	Up to 150°F (66°C)
Materials of Construction	Cast iron standard. Optional materials available to meet the application requirements.	Cast iron or fabricated steel.	Cast iron standard. Optional materials available to meet the application requirements.	Cast iron standard. Optional materials available to meet the application requirements.

NOTE: For application requirements exceeding these limits, please refer to factory.

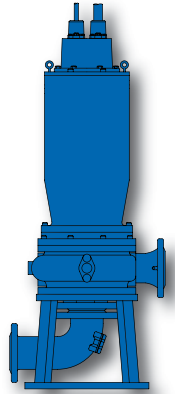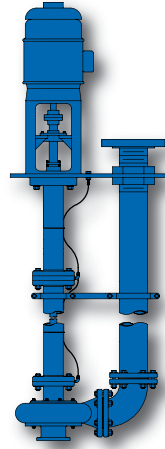
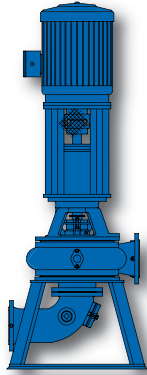
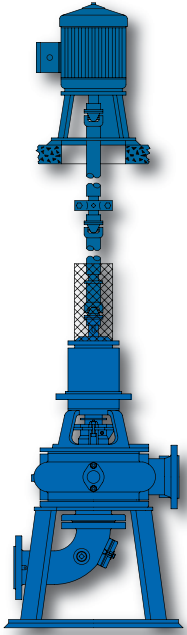


6250	6260	7000	8000	9100	9235
Vertical Open-Shaft Dry-Pit Solids Handling Pumps	Vertical Pedestal Mounted Dry-Pit Solids Handling Pumps	Rotary Sliding-Vane Air Compressors	Vertical Suspended Wet-Pit Solids-Handling Pumps	Submersible Solids-Handling Pumps	Dry-Pit Submersible Solids-Handling Pumps
Up to 20,000 gpm (4,540 m ³ /h)	Up to 20,000 gpm (4,540 m ³ /h)	Up to 300 cfm (510 m ³ /h)	Up to 6500 gpm (1476 m ³ /h)	Up to 9,000 gpm (2,043 m ³ /h)	Up to 10,000 gpm (2,270 m ³ /h)
Up to 300 feet (91 m)	Up to 300 feet (91 m)		Up to 250 feet (76 m)	Up to 270 feet (82 m)	Up to 300 feet (91 m)
To fit the application.		Up to 50 psi (345 kPa)	To fit the application.	To fit the application.	To fit the application.
Up to 350 hp (261 kW)	Up to 350 hp (261 kW)	Up to 60 hp (45 kW)	Up to 200 hp (149 kW)	Up to 200 hp (149 kW)	Up to 150 hp (112 kW)
Vertical electric motors with flexible intermediate lineshaft ("cardan" shaft)	Vertical electric motors with direct flexible coupling.	Horizontal electric motors	Vertical electric motors with direct flexible coupling.	Submersible Electric Motors (IP68)	Submersible Electric Motors (IP68) suitable for continuous operation submerged or non-submerged.
Wastewater, sewage, sludge, light slurries, stormwater, industrial waste	Wastewater, sewage, sludge, light slurries, stormwater, industrial waste	Air	Wastewater, sewage, sludge, light slurries, stormwater, industrial waste	Wastewater, sewage, sludge, light slurries, stormwater, industrial waste	Wastewater, sewage, sludge, light slurries, stormwater, industrial waste
Up to 150°F (66°C)	Up to 150°F (66°C)	Up to 120°F (49°C)	Up to 150°F (66°C)	Up to 200°F (93°C)	Up to 150°F (66°C)
Cast iron standard. Optional materials available to meet the application requirements.	Cast iron standard. Optional materials available to meet the application requirements.	Cast iron	Cast iron standard. Optional materials available to meet the application requirements.	Cast iron standard. Optional materials available to meet the application requirements.	Cast iron standard. Optional materials available to meet the application requirements.



PumpfinderPlus® Pump Selection & Sizing Software

Yeomans provides the latest in free, user-friendly pump selection and sizing software for all of our pump types and configurations; with easy online web access and supporting documents, including specifications, installation drawings, product information and sales brochures. The program facilitates easy submission of quotation and engineering support requests to our staff of experienced application engineers.

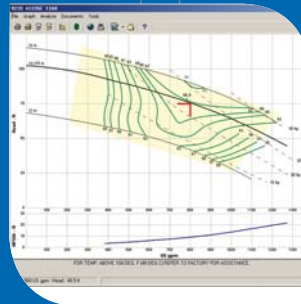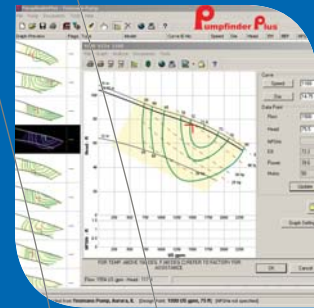

Yeomans Pump
3905 Enterprise Court
Aurora, IL 60504
630-236-5500
www.yeomanspump.com



ISO 9001:2000 Quality System

Bulletin YP Product Line-05 08