


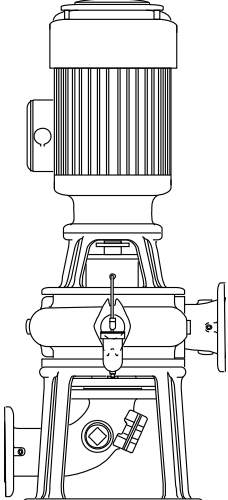


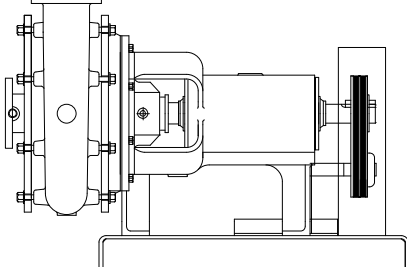

	<p>Horizontal Base-Mounted Dry-Pit Solids Handling Pumps</p> <ul style="list-style-type: none"> • Discharge Sizes: 4" ~ 54" • Capacities to 140,000 USGPM (32,000 m3/h) • Heads to 300 feet (91m) • Custom "high head" systems available • Solids to 9-3/4" dia. (388mm)
	<p>Vertical Pedestal-Mounted Dry-Pit Solids Handling Pumps</p> <ul style="list-style-type: none"> • Discharge Sizes: 4" ~ 54" • Capacities to 140,000 USGPM (32,000 m3/h) • Heads to 300 feet (91m) • Custom "high head" systems available • Solids to 9-3/4" dia. (388mm)
	<p>Vertical Open-Shaft Dry-Pit Solids Handling Pumps</p> <ul style="list-style-type: none"> • Discharge Sizes: 4" ~ 54" • Capacities to 140,000 USGPM (32,000 m3/h) • Heads to 300 feet (91m) • Custom "high head" systems available • Solids to 9-3/4" dia. (388mm)

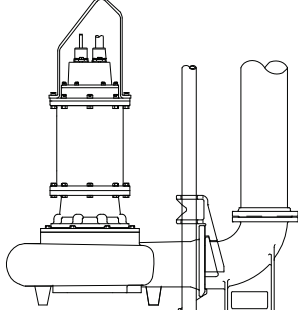

	<p>Vertical Close-Coupled Dry-Pit Solids Handling Pumps</p> <ul style="list-style-type: none"> • Discharge Sizes: 4" & 6" • Capacities to 2,500 USGPM (568 m3/h) • Heads to 225 feet (69m) • Solids to 3" dia. (76mm)
	<p>Severe-Duty Cup-Type Recessed Impeller Pumps</p> <ul style="list-style-type: none"> • Discharge Sizes: 2" ~ 8" • Capacities to 4,600 USGPM (1,045 m3/h) • Heads to 150 feet (45m) • Solids to 8" dia. (200mm)
	<p>Submersible Solids-Handling Pumps</p> <ul style="list-style-type: none"> • Discharge Sizes: 3" ~ 14" • Capacities to 9,000 USGPM (2,043 m3/h) • Heads to 270 feet (82m) • Solids to 6" dia. (152mm)
	<p>Easy-Lift® Package Lift Stations</p> <ul style="list-style-type: none"> • Wet-Well Basins 36" ~ 96" dia. • Basin Depths 48" ~ 180" • Optional Valve Box • Pump Discharge Sizes: 3" ~ 4" • Capacities to 1,500 USGPM (340 m3/h) • Heads to 150 feet (46m) • Solids to 3" dia. (152mm) • Compact integrated control panel and level controls

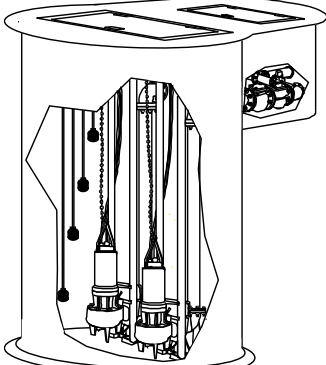


	<p>Dry-Pit Submersible Solids-Handling Pumps</p> <ul style="list-style-type: none"> • Discharge Sizes: 4" ~ 18" • Capacities to 10,000 USGPM (2,270 m3/h) • Heads to 300 feet (91m) • Solids to 6" dia. (152mm)
	<p>Vertical Suspended Screened-Inlet Wet-Pit Pumps</p> <ul style="list-style-type: none"> • Discharge Sizes: 1-1/2" ~ 8" • Capacities to 3,000 USGPM (681 m3/h) • Heads to 350 feet (107m) • Solids to 1-7/8" dia. (48mm)
	<p>Vertical Suspended Wet-Pit Solids-Handling Pumps</p> <ul style="list-style-type: none"> • Discharge Sizes: 4" ~ 12" • Capacities to 6,500 USGPM (1,476 m3/h) • Heads to 250 feet (76m) • Solids to 5" dia. (127mm)



	<p>Shone® Pneumatic Ejector Systems</p> <ul style="list-style-type: none"> • Capacities to 600 USGPM (136 m3/h) • Heads to 170 feet (52m) • Standard air operated; optional systems available for steam operation.
	<p>Rotary Sliding-Vane Air Compressors</p> <ul style="list-style-type: none"> • Capacities 300 cfm (510 m3/h) • Pressures to 50 psi (345 kPa)
	<p>Sewer Chewer® Severe-Duty Grinders – Channel-Mount Type</p> <ul style="list-style-type: none"> • Efficient solids conditioning • Capacities to 2,200 USGPM (500 m3/h) • Standard TEFC integrated gearmotor; Optional submersible (IP68) motor for submerged or flood-prone applications • Standard NEMA 4X digital interface controller; solid-state PLC based; with jam-sensing and auto-reversing features
	<p>Sewer Chewer® Severe-Duty Grinders – Inline-Mount Type</p> <ul style="list-style-type: none"> • Efficient solids conditioning • Capacities to 1,500 USGPM (341 m3/h) • Standard TEFC integrated gearmotor; Optional submersible (IP68) motor for submerged or flood-prone applications • Standard NEMA 4X digital interface controller; solid-state PLC based; with jam-sensing and auto-reversing features

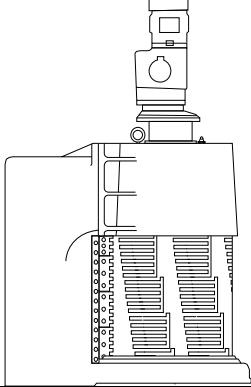

	<p><i>The Original Chicago Pump® Comminutor</i></p> <ul style="list-style-type: none">• Capacities to 50,000 USGPM (11,355 m³/h)• Sizes 7" ~ 54"• Inline units in 7" and 10" size
---	---